

N
TRUE NORTH

SITE DATA

ESE Lower Bowl	3,240 seats
ESE Upper Tier	2,448 seats
New seats total	5,688
Code profile	IBC-2021

COORDINATION

Checks	0 fail / 1 warn
WARN	parcel boundary source

DATA SOURCES

© OpenStreetMap contributors (ODbL)
USGS 3DEP LiDAR KY_Eastern_B1_2019 (public d
* = height estimated (untagged)

ARCHKIT STUDIO

PROJECT
Kroger Field — archkit Tool Demo (not a design proposal)

ADDRESS
Kroger Field, 1540 University Dr, Lexington, KY 40506

CLIENT
Example — University of Kentucky Athletics

PROJECT NO.
2026-UK-01

ISSUE
TOOL DEMONSTRATION

DATE
2026-11-09


GENERAL NOTES

1. TOOL DEMONSTRATION ONLY - sections are test inputs, not a renovation proposal.
2. Existing conditions from OSM + USGS LiDAR.
3. Obtain stadium as-builts / point-cloud survey before design development.
4. PRELIMINARY — NOT FOR CONSTRUCTION.
5. Site context from public data; verify with boundary & topographic survey.
6. Code checks are preliminary; AHJ review governs.

1 / C1.0 **ARCHITECTURAL SITE PLAN**
SCALE: 1" = 40'

0 12.5 25 37.5 50 FT

SITE PLAN
C1.0
archkit

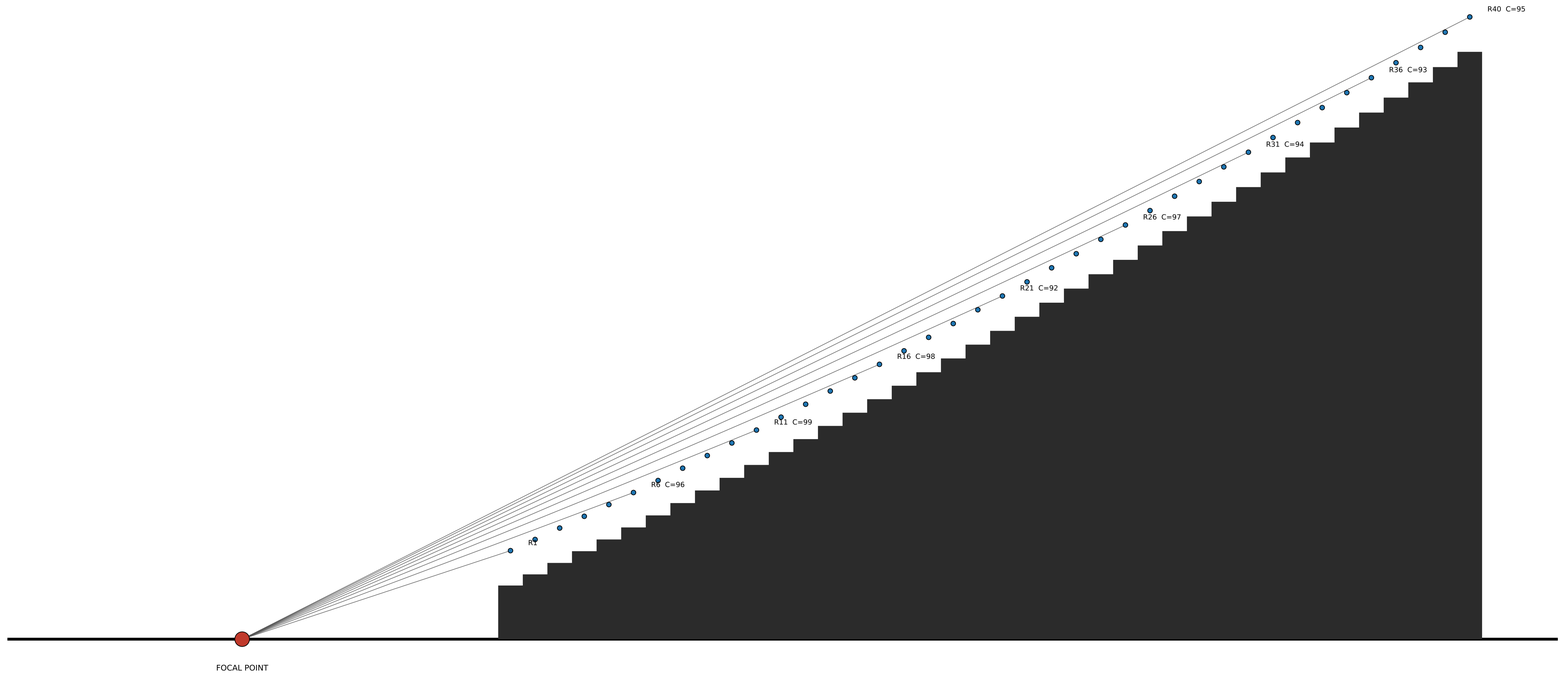

ESE LOWER BOWL — SIGHTLINE SECTION

1 / S1.1

SCALE: 1/8" = 1'-0"

0 2.5 5 7.5 10 FT

SIGHTLINE SCHEDULE

Row	Dist	Eye ht	Riser	C (mm)
1	30.0'	9.90"		
2	32.8'	11.15'	14.96"	95
3	35.5'	12.43'	15.35"	97
4	38.2'	13.74'	15.75"	99
5	41.0'	15.05'	15.75"	92
6	43.8'	16.40'	16.14"	96
7	46.5'	17.74'	16.14"	90
8	49.3'	19.12'	16.54"	95
9	52.0'	20.53'	16.93"	99
10	54.8'	21.94'	16.93"	94
11	57.5'	23.38'	17.32"	99
12	60.3'	24.83'	17.32"	95
13	63.0'	26.27'	17.32"	90
14	65.8'	27.75'	17.72"	96
15	68.5'	29.22'	17.72"	92
16	71.3'	30.73'	18.11"	98
17	74.0'	32.24'	18.11"	95
18	76.8'	33.75'	18.11"	91
19	79.5'	35.29'	18.50"	98
20	82.3'	36.84'	18.50"	95
21	85.0'	38.38'	18.50"	92
22	87.8'	39.95'	18.90"	98
23	90.5'	41.53'	18.90"	95
24	93.3'	43.10'	18.90"	93
25	96.0'	44.71'	19.29"	100
26	98.8'	46.32'	19.29"	97
27	101.5'	47.92'	19.29"	94
28	104.3'	49.53'	19.29"	92
29	107.0'	51.17'	19.69"	99
30	109.8'	52.81'	19.69"	97
31	112.5'	54.45'	19.69"	94
32	115.3'	56.09'	19.69"	92
33	118.0'	57.77'	20.08"	100
34	120.8'	59.44'	20.08"	97
35	123.5'	61.11'	20.08"	95
36	126.3'	62.79'	20.08"	93
37	129.0'	64.46'	20.08"	91
38	131.8'	66.17'	20.47"	99
39	134.5'	67.87'	20.47"	97
40	137.3'	69.58'	20.47"	95

SECTION DATA

Rows	40
Tread	33.0"
Target C	90 mm
Min C achieved	90 mm
Max rake	31.8°
Seats	3,240
Seats/row	81
Aisles	6

ARCHKIT STUDIO

PROJECT
Kroger Field — archkit Tool Demo (not a design proposal)

ADDRESS
Kroger Field, 1540 University Dr, Lexington, KY 40506

CLIENT
Example — University of Kentucky Athletics

PROJECT NO.
2026-UK-01

ISSUE
TOOL DEMONSTRATION

DATE
2026-11-09


GENERAL NOTES

1. TOOL DEMONSTRATION ONLY - sections are test inputs, not a renovation proposal.
2. Existing conditions from OSM + USGS LiDAR.
3. Obtain stadium as-builts / point-cloud survey before design development.
4. PRELIMINARY — NOT FOR CONSTRUCTION.
5. Site context from public data; verify with boundary & topographic survey.
6. Code checks are preliminary; AHJ review governs.

SEATING BOWL — ESE LOWER BOWL

S1.1

archkit

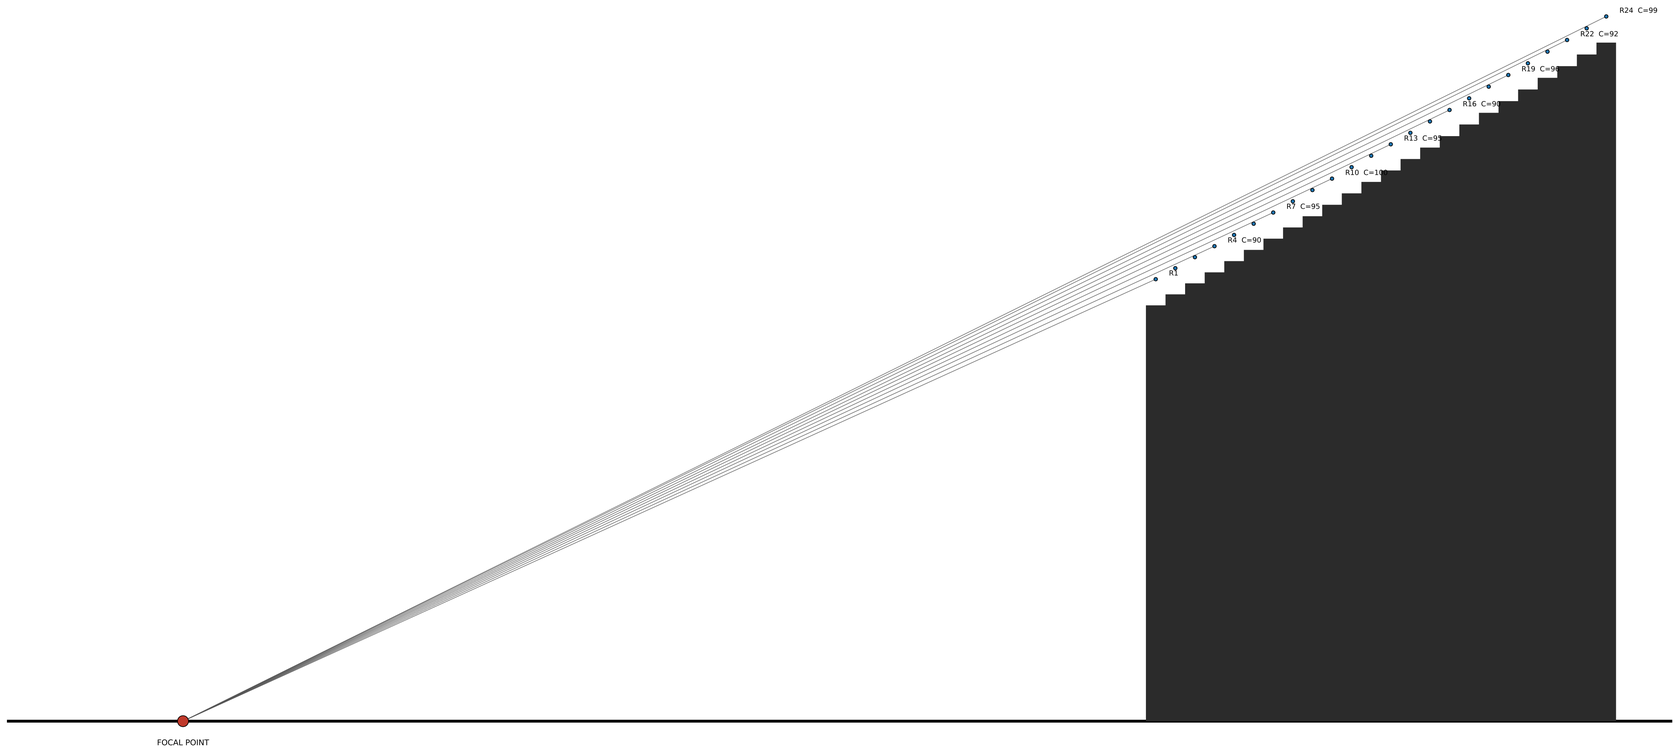

1 S1.2 ESE UPPER TIER — SIGHTLINE SECTION

SCALE: 3/32" = 1'-0"

0 4 8 12 16 FT

SIGHTLINE SCHEDULE

Row	Dist	Eye ht	Riser	C (mm)
1	145.0'	65.90'		
2	147.9'	67.54'	19.69"	94
3	150.8'	69.18'	19.69"	92
4	153.8'	70.82'	19.69"	90
5	156.7'	72.49'	20.08"	98
6	159.6'	74.17'	20.08"	96
7	162.5'	75.84'	20.08"	95
8	165.4'	77.51'	20.08"	93
9	168.4'	79.19'	20.08"	91
10	171.3'	80.89'	20.47"	100
11	174.2'	82.60'	20.47"	98
12	177.1'	84.31'	20.47"	96
13	180.0'	86.01'	20.47"	95
14	183.0'	87.72'	20.47"	93
15	185.9'	89.42'	20.47"	92
16	188.8'	91.13'	20.47"	90
17	191.7'	92.87'	20.87"	99
18	194.6'	94.61'	20.87"	97
19	197.6'	96.35'	20.87"	96
20	200.5'	98.09'	20.87"	95
21	203.4'	99.82'	20.87"	93
22	206.3'	101.56'	20.87"	92
23	209.2'	103.30'	20.87"	91
24	212.2'	105.07'	21.26"	99

SECTION DATA

Rows	24
Tread	35.0"
Target C	90 mm
Min C achieved	90 mm
Max rake	31.2°
Seats	2,448
Seats/row	102
Aisles	5

ARCHKIT STUDIO

PROJECT
Kroger Field — archkit Tool Demo (not a design proposal)

ADDRESS
Kroger Field, 1540 University Dr, Lexington, KY 40506

CLIENT
Example — University of Kentucky Athletics

PROJECT NO.
2026-UK-01

ISSUE
TOOL DEMONSTRATION

DATE
2026-11-09

GENERAL NOTES

1. TOOL DEMONSTRATION ONLY - sections are test inputs, not a renovation proposal.
2. Existing conditions from OSM + USGS LiDAR.
3. Obtain stadium as-builts / point-cloud survey before design development.
4. PRELIMINARY — NOT FOR CONSTRUCTION.
5. Site context from public data; verify with boundary & topographic survey.
6. Code checks are preliminary; AHJ review governs.

SEATING BOWL — ESE UPPER TIER

S1.2

archkit